

# tier<sup>TM</sup>

*Fabulous, functional, forever.*

[www.tierflooring.com](http://www.tierflooring.com)



Low-maintenance,  
high living

TIER<sup>TM</sup> luxury rigid core flooring.








# Love your floors.

Love how you live with flooring that takes the hassle out of floorownership. TIER™ indoor flooring offers you all the benefits of wood flooring without the drawbacks. Aesthetics that mimic wood - with durability, scuff resistance and eco-friendly features that far outperform that of other indoor flooring products.

TIER™ makes your life and you home- simpler, greener and more beautiful.

## APPLICATIONS

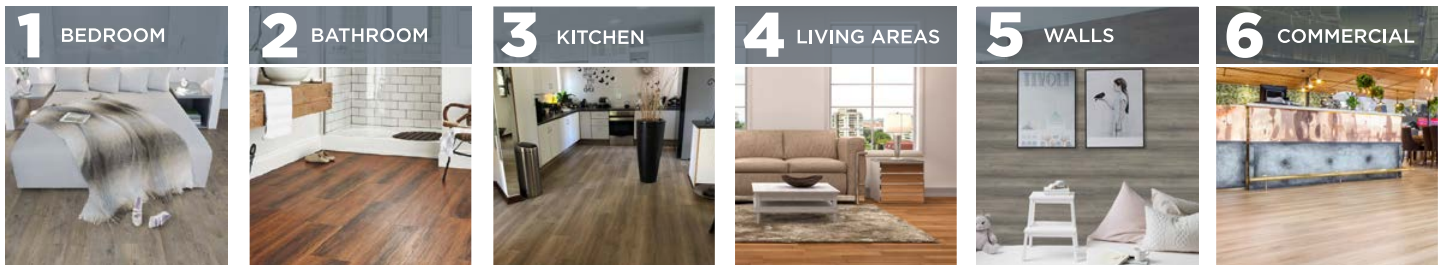

## BENEFITS



Rigid



Heat resistant



Stable



Water resistant



Click installation



VOC free



Floor or wall



Antimicrobial








# Engineering meets style.

## TIERS OF TIER™

TIER™ flooring offers a cutting edge embossed wear layer to give your floor a natural and tactile feeling. Anti-slip and anti-UV protection provide the ultimate in longevity, safety and style.

## LUXURY RIGID CORE FLOORING

*With CarbideCore™ technology.*

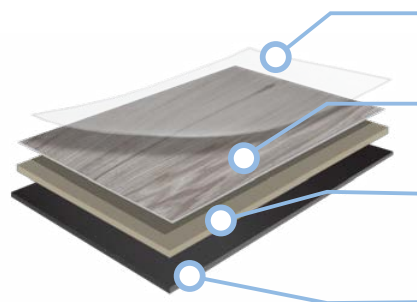

### WEAR LAYER

UV, scratch and slip resistant.

### PRINT LAYER

Photorealistic print technology.

### CARBIDECORE™


Manufactured with solar energy.

### SOFT INSULATING FOAM

Reduces noise and allows for a softer under foot feeling.

## EASY INSTALLATION

Installing TIER™ flooring is made quick and easy with a rigid tongue and groove click groove that creates a watertight, seamless finish. For details, visit the website [www.tierflooring.com](http://www.tierflooring.com) and download the care and installation guides.

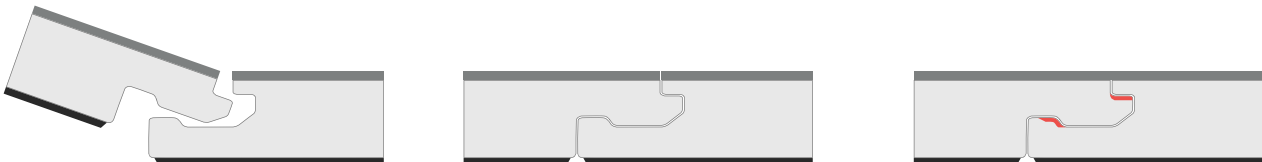

# Flooring to love and live on.

## PROFILE AND WARRANTY

TIER™ has chosen a rigid durable SPC profile for added strength and longevity. TIER™ is now available in a glue down option and traditional click groove system.

5.0 mm



181.0 mm

SPECIFICATIONS		
Core thickness (mm)	Dimensions (mm)	Boards per box
3.50	181 x 1 220	10
Underlay thickness (mm)	Thickness (mm)	Mass per board (kg)
1.50	5.55	1.65
Wear layer thickness (mm)	m <sup>2</sup> per board	m <sup>2</sup> per box
0.55	0.22	2.21
Wear layer type	Click system	
Engineered polymer	Yes	

COMMERCIAL WARRANTY CLASSES		
Light Industrial	Heavy Commercial	Heavy Domestic
<b>5</b> YEARS WARRANTY	<b>10</b> YEARS WARRANTY	<b>30</b> YEARS WARRANTY
Abrasion class*	Abrasion class*	Abrasion class*
AC5	AC5	AC5
Use class**	Use class**	Use class**
23	33	42

\*As defined in BS EN 13329.

\*\*As defined in BS EN ISO 10582.

## COLOURS AND STYLES

TIER™ flooring is designed to be beautiful and livable. Choose the style and colour that best suits your home and make your floors your favorite feature.







# Love your home.



## Choose quality alternatives to timber that improve your lifestyle and the environment.

TIER™ is setting the benchmark for eco flooring and green manufacturing processes. TIER™ high performance products are created using solar energy and are an ultra-low maintenance, water resistant alternative to timber. With TIER™ indoor flooring you make a positive impact on your home and the Earth.



### Made with solar energy

TIER™ flooring is manufactured using solar power and greatly decreases our overall carbon emissions. This benefit to the environment offers real peace of mind for our customers.



### High fire resistance rating

TIER™ flooring has the highest fire resistance rating possible in its class, making it a safer and more reliable product for your home. Comprehensive fire reaction data is available for your fire engineer upon request.

Forest Stewardship Council (FSC) certification ensures that products come from responsibly managed forests that provide environmental, social and economic benefits. The diverse fauna and flora who share our forests are given the time and space to recover from our use of their environments.

# tier™

*Fabulous, functional, forever.*



Intertek



Contact Tel: +27 10 593 9221

E-mail: [info@tierflooring.com](mailto:info@tierflooring.com)

[www.tierflooring.com](http://www.tierflooring.com)